


## Bag Filter Range

Bag filters are used in almost every industry to remove sediment, debris and gelatinous particles from liquids in higher flow or viscosity applications.

Fluid processes where high solids content and wide ranges of sizes and shapes of particles, require removal, benefit from the very large dirt holding capacity of bag filters, making them the economical bulk solids removal solution.

IFAB's filter bags are mainly produced in four different types of material; Polyester, Polypropylene, Nylon and Nomex. Both standard and extended life media are available. The bags have a wide range of micron ratings and are sealed with a ring made of either steel or plastic. It's also possible to get it welded or stitched.

IFAB offers customized selection of size, material, ring and micron.

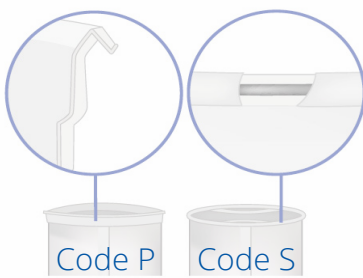

### Key Product Features

- Total customized on request
- Easy bag changing
- Contamination is kept inside the bag, thanks to the inside-out flow
- Welded construction of bags completely eliminates unfiltered liquid bypass from occurring due to needle holes
- 100% Silicone free to eliminate cratering for improved surface results
- Suitable within automotive
- Single packed Food Grade bags available

	Full range of bag filters								
	1 2 3 4 & Special								
	1-1200 micron								
	1.5 Bar								
	<table border="0"> <tr> <td>Polypropylene</td> <td>90°C</td> </tr> <tr> <td>Polyester</td> <td>140°C</td> </tr> <tr> <td>Nylon</td> <td>140°C</td> </tr> <tr> <td>Nomex</td> <td>190°C</td> </tr> </table>	Polypropylene	90°C	Polyester	140°C	Nylon	140°C	Nomex	190°C
Polypropylene	90°C								
Polyester	140°C								
Nylon	140°C								
Nomex	190°C								
	See webpage for related products								
	Custom made & OEM available								
	Produced by <b>IFAB</b> Sweden								
	CE  FDA ED 2002/72/EC								